



Technical Data Sheet Armal EASY 600V B3 Vacuum Tank Unit

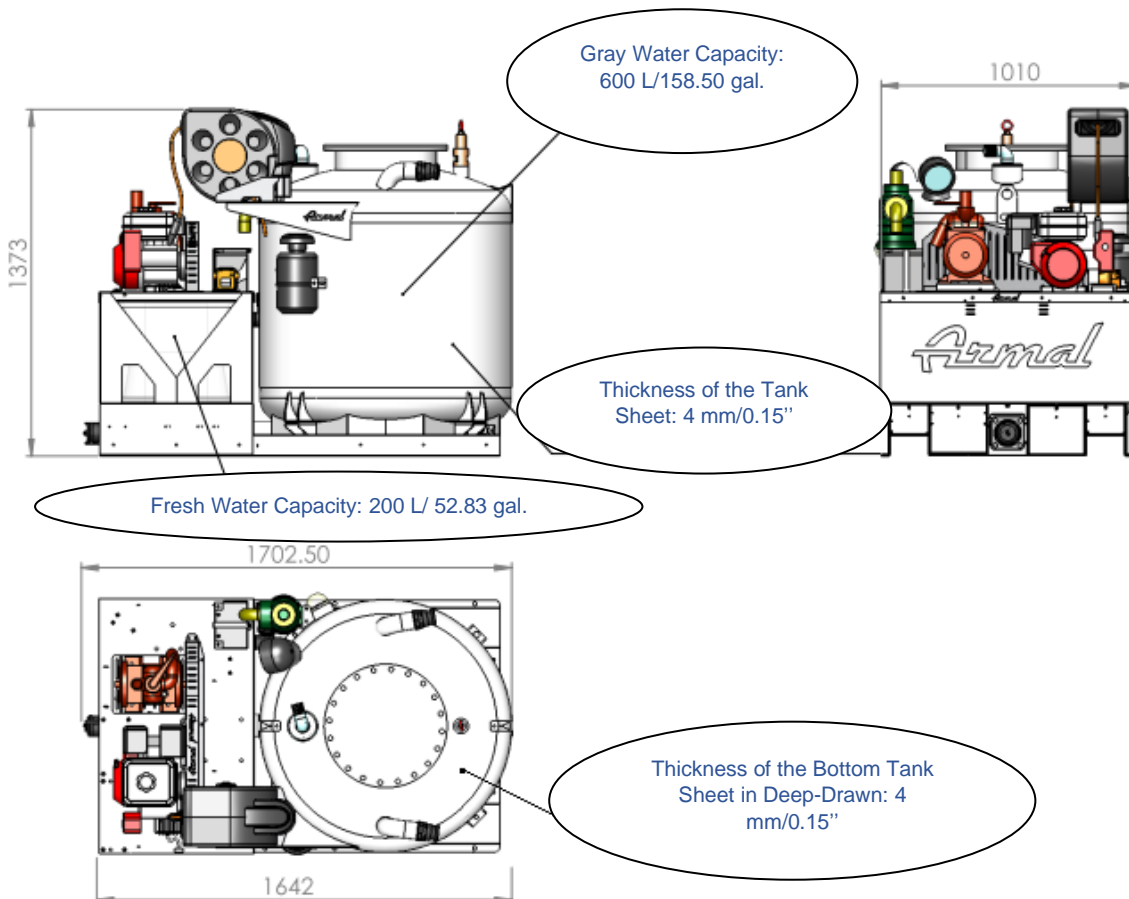

DESCRIPTION: Light Engine Driven Vacuum Tank Unit with Belt Drive System / 600 L/158.50 gal. gray water tank capacity and 200 L/52.83 gal. fresh water tank capacity (purchase item No. 600VB3).

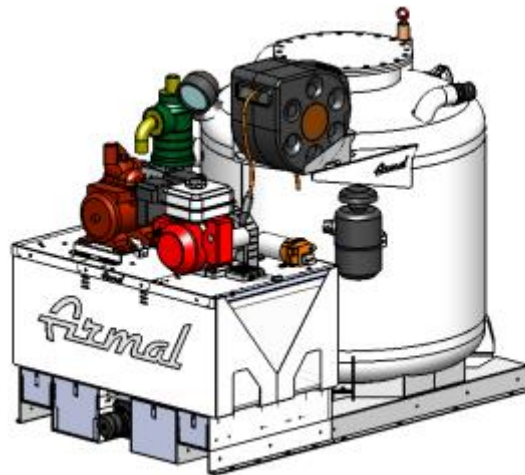

Technical Data Sheet

Armal EASY 600V B3 Vacuum Tank Unit

SPECIFICATIONS:

| | |
|--|---|
| Height (max.) | 1.500 mm / 59.05" |
| Width (max.) | 1.010 mm / 39.76" |
| Length (max.) | 1.650 mm / 64.96" |
| Diameter | 1.000 mm / 39.37" (vertical) |
| Gray water capacity | 600 L / 158.50 gal. approx. |
| Fresh water capacity | 200 L / 52.83 gal. approx. |
| Weight in running order | 440 kg / 970.05 lb. |
| Length of the gray water suction hose | 9,50 m / 374.02" |
| Length of the washing hose | 10 m / 393.70" |
| Water pump max. performance (mod. UP2-P 12V) | 5 L/min. / 1.32 gal./min. – 1.5 bar / 21.75 psi |
| Vacuum pump with blades max performance (mod. BP MEC1600P) | 1.980 L/min. / 523.06 gal./min. (air)@1.400 rpm |
| Thickness of the tank sheet | 4 mm / 0.15" |
| Thickness of the bottom tank sheet in deep-drawn | 4 mm / 0.15" |
| Engine | Honda GX160/gasoline |
| Material used | Main tank body made of carbon steel; fresh water tank in plastic material |

FEATURES:

| Description | Standard | Optional |
|---|----------|----------|
| Honda engine mod. GX160 with recoil and electric start | x | |
| Water pump max. performance: 15 litres/min. – 3.96 gallons/min. – 5 bar / 72.51 psi | | x |
| Vacuum pump filter-silencer | | x |
| No. 1 gray water suction hose 9,50 metres/374.02" long complete with syringe | x | |
| No. 1 automatic hose reel with 10 metres/393.70" washing hose (low pressure) | x | |
| Fresh water tank in plastic material | x | |
| Ball overflow valve and siphon valve | x | |
| Safety relief valve | x | |
| One big sight glass bowl and additional smaller ones to monitor the gray water level | x | |
| Manhole on the gray water tank to allow operators to check its interior and to clean it in case of extraordinary maintenance operations | x | |

All technical data are approx. and non-binding. Armal S.p.A. reserves the right to make any changes at any time without notice.

Rev. 02 dd 28/11/2023

p. 2/2